




3 - SIDED KENNEL DOORS

COMMONLY MOUNTED ON THE
EXTERIOR SIDE OF WALLS

3 - SIDED KENNEL DOORS ARE CUSTOM MADE TO FIT MOST ANY SIZE OF WALL PENETRATION. THESE DOORS ARE DESIGNED TO BE INSTALLED ALONG WITH OVERHEAD GUILLOTINE KENNEL DOORS TO MAXIMIZE ENERGY EFFICIENT


INTERIOR CORNER CLOSE UP VIEW

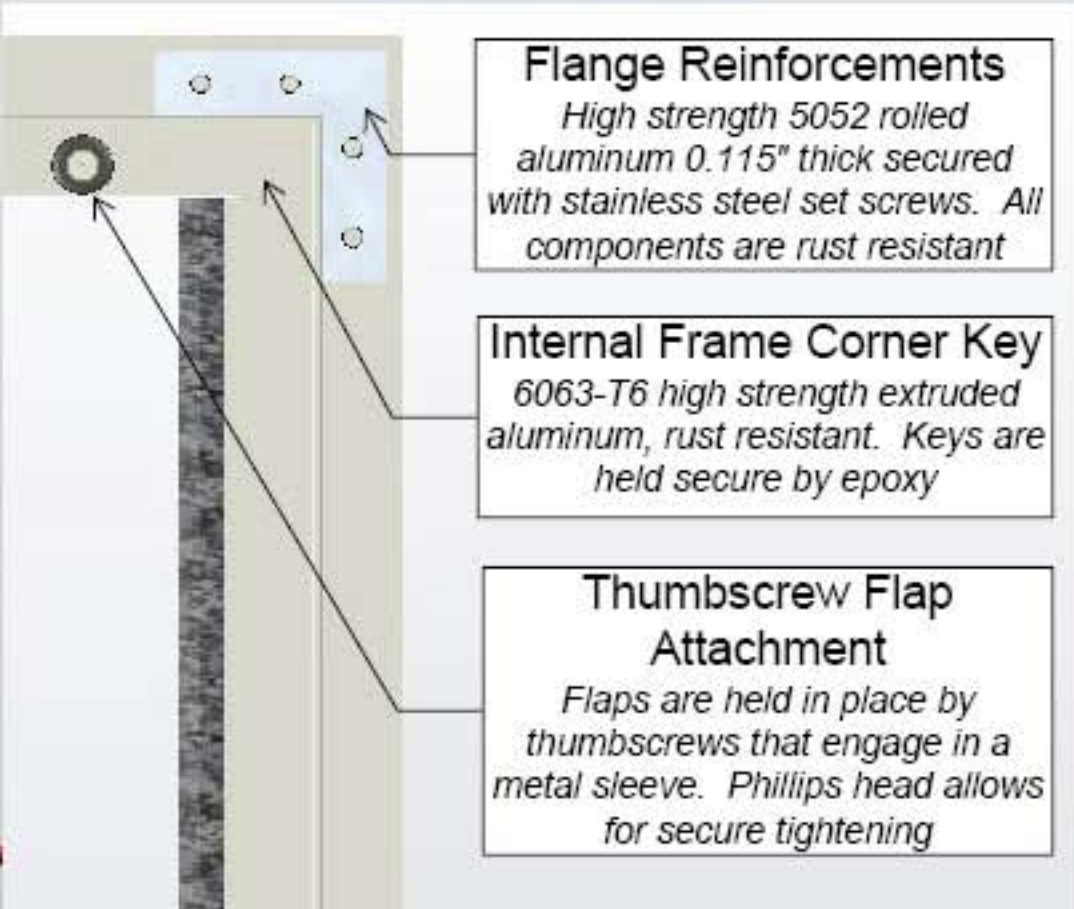

Flange Reinforcements
High strength 5052 rolled aluminum 0.115" thick secured with stainless steel set screws. All components are rust resistant

Internal Frame Corner Key
6063-T6 high strength extruded aluminum, rust resistant. Keys are held secure by epoxy

Thumbscrew Flap Attachment
Flaps are held in place by thumbscrews that engage in a metal sleeve. Phillips head allows for secure tightening

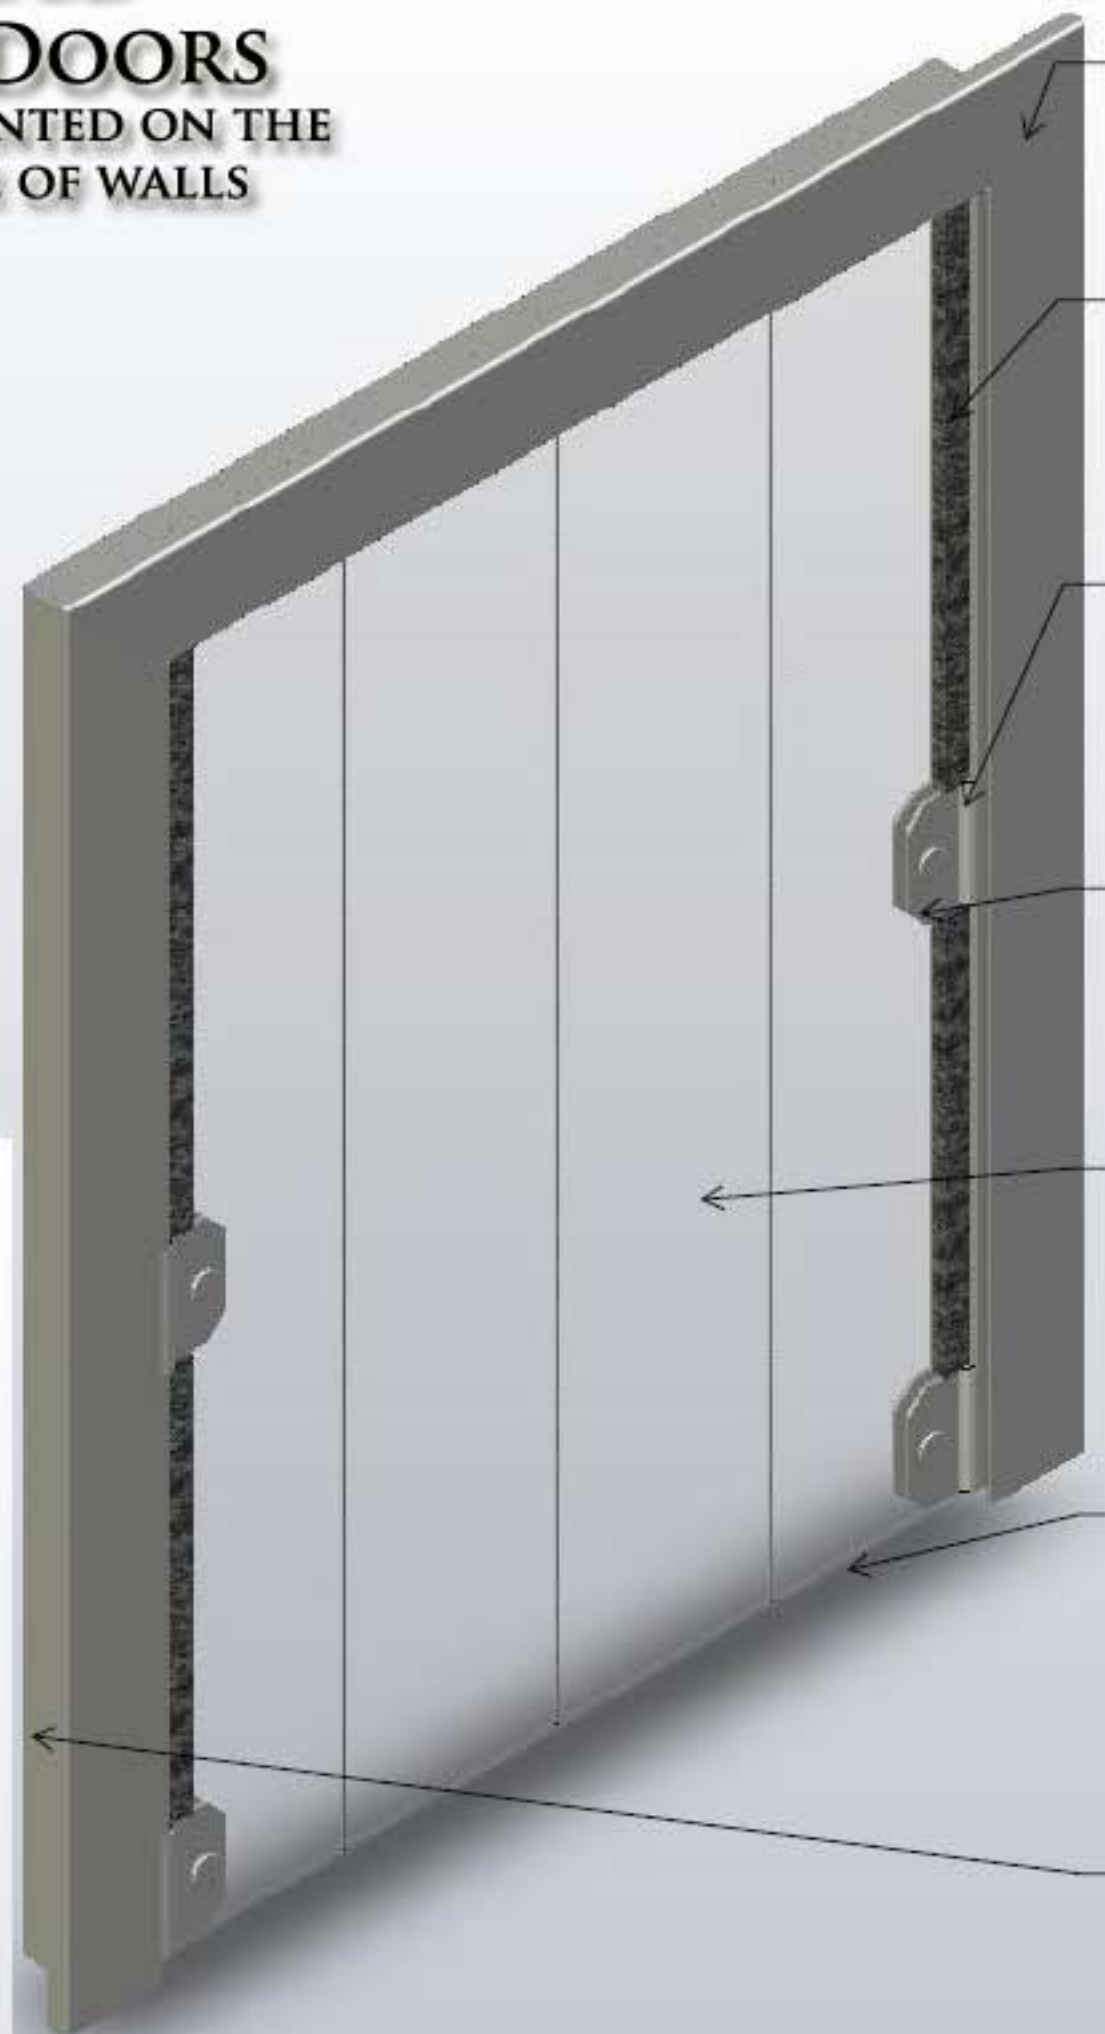

Heavy Aluminum Frame
Consists of 6063-T6 high strength extruded aluminum. Available in 10 oven baked powder coated finish colors

Weather Seal Brushes
Heavy duty, dense brush weather seal lines sides of each flap to eliminate drafts and leakage

Alnico #5 Magnets
1 1/2" long magnets are secured into the frame, aligning with stainless steel strike plates. Magnets are replaceable. (Alnico magnets are made of aluminum, nickel & cobalt...strongest available)

Stainless Steel Strike Plates
430 / Stainless Plates are attached with brass nickel rivets to the flap for secure placement. They align with the Alnico magnets for a positive flap seal

Weatherized /UV Flap
Nylon reinforced, treated to prevent shrinking and be resistant to UV damage. 0.160" thick, low temp PVC. Material is self extinguishing.

Flap to Floor Clearance
Each door is made to order so that you have a custom fit frame for the penetration opening, with the flap shortened by 3/16" to minimize wear and dragging. This clearance also allows for easy spray cleaning of the kennel area

Mounting Sleeve Flange
1 1/8" sleeve flange allows for easy installation into a variety of walls. We recommend choosing attachment screws based on wall composition; for example wood or masonry