

MAXSEAL WALL MOUNTED PREMIUM PET DOORS

POSSIBLE PRODUCTION VARIATIONS

Single or dual flap model Standard 10" tunnel or Optional 16" Tunnel (Trim-to-Fit) 10 standard sizes 10 powder coated color options Security panel available in White or Black Top load, left side load or right side loaded security Panel

Corner Reinforcements

High strength rolled aluminum corner brackets secured with stainless steel set screws. Also has internal aluminum key insert held with industrial strength epoxy

Heavy Duty Lock Bolt Pin

Features a 1/4 turn lock out, springloaded bolt pin that allows for easy one handed operation. Machine finished to match designer security panel handle

Weatherized Vinyl Flexible Flaps

Nylon reinforced, low temperature flexible vinyl PVC. UV protected and treated so that flap will not shrink or yellow. Will remain flexible in cold weather. Flaps are self extinguishing when exposed to flame

Heavy Duty Frame

MaxSeal features the strongest frame in the pet door industry. Constructed of 6063-T6 high strength extruded aluminum 00.70"- 0.090" thick.

Offered in 10 powder coated finishes

Solid Trim-to-Fit Aluminum Wall Tunnel


The MaxSeal Wall mount comes standard with a 10" trim-to-fit tunnel for any wall thickness from 2-10". There is also an optional 16" trim-to-fit tunnel for wall thicknesses up to 16". Easy to trim with standard pair of tin snips, allows for a custom fit to your wall

Weather Seal Brushes

Heavy duty, dense brush weather seal lines the flap perimeter to eliminate drafts and air leakage

Stainless Steel Strikes / Magnets

Stainless strike plates are riveted to the flap for durability and maintained proper placement to magnet surface. Each Strike plate aligns with an 1 1/2" long Alnico magnet embedded into the frame to create a positive flap seal. (The number of magnets per flap will depend on the size of pet door selected)

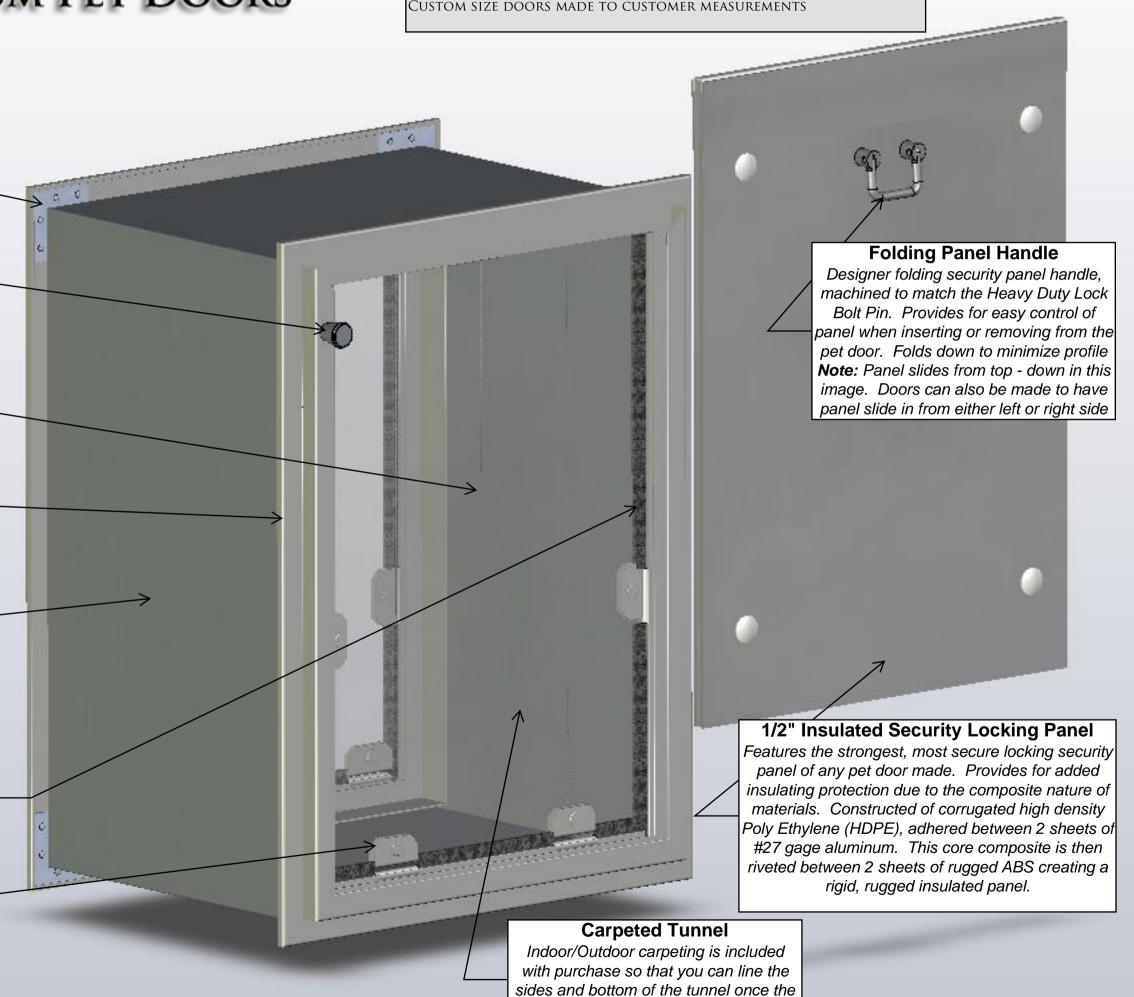

door is installed. (Note: adhesive not

included, recommend using silicone)